

Custom Cable Request Form

Create your own custom cable with this form by indicating cable type, length, and jacket type as well as connector gender, connector type, and special instructions. If you select foil shielded as the cable type, remember to circle your drain-wire option. Lastly, indicate your pinning requirements.

After you've submitted the form, you'll receive a confirmation e-mail. Need help? Call our FREE Tech Support.

0201 888 888

1 Cable Type: (Check as many as apply)


- CAT5e
CAT6
CAT6a
Unshielded
Foil Shielded
Foil and Copper-Braid Shielded
Solid
Stranded

- 62.5/125-µm Multimode Fiber
50/125-µm Multimode Fiber
50/125-µm (OM3) Multimode Fiber
8.5/125-µm Single-Mode Fiber
Simplex Fiber
Duplex Fiber
Other:

- Jacket Type:
PVC
LSZH

Standard Cable-Length Tolerances
0-3 m ..... +0,07 m/-0 m
3,01-30,4 m..... +0,15 m/-0 m
30,41 m +..... +0,30 m/-0 m

2 Connectors:

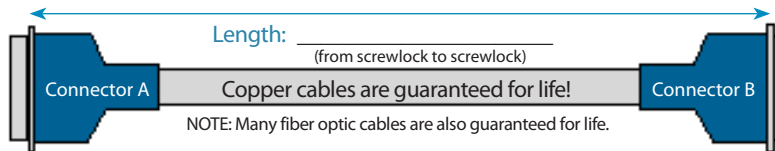

Gender: M F

Connector Type: (Circle one)

- 1. DB9 12. RJ-45 8-wire 22. Fiber FDDI
2. DB15 13. DEC MMJ 23. M/34 (V.35)
3. DB25 14. RJ-45 10-wire 24. 50-pin Berg:
4. DB37 15. RJ-45 8-wire, RS-232 or SCSI
5. DB50 shielded 25. 4-pin mini DIN
6. 15-pin high-density 16. M/50 26. 5-pin DIN
7. 36-pin Centronics\* 17. Fiber ST\* 27. 6-pin mini DIN
8. 50-pin telco 18. Fiber SC 28. 8-pin mini DIN
9. RJ-11 4-wire 19. Fiber LC 29. Spade lugs
10. RJ-12 6-wire 20. Fiber MT-RJ length:
11. RJ-22 4-wire 21. Fiber MU 30. Other

Special Instructions: (Circle options)

- 1. One end cut
2. Pins only
3. Hood type (Plastic if not specified):
Metal hood 45° hood Removable hood
Plastic hood Molded hood
4. Thumbscrews
5. Screw locks: M or F (Male if not specified) metric/English
6. 90° hood—specify cable exit, Pin #
NOTE: Default is Male=Pin 1, Female=Opposite
7. Pairing
8. Flying leads, length:
9. Label:
10. 50-pin telco: ears or bail latches
11. 36-pin Centronics: ears or bail latches
12. Packaging—please attach specs
13. Other—please attach specs

Drain Wire: (Circle one)

(Applies only to foil-shielded cables)

- 1. Cut drain wire
2. Pin drain by itself Pin #
3. Wrap drain with conductor Pin #
If 1-3 are not chosen,
4. Attach drain to shell

Gender: M F

Connector Type: (Circle one)

- 1. DB9 13. DEC MMJ 24. 50-pin Berg:
2. DB15 14. RJ-45 10-wire RS-232 or SCSI
3. DB25 15. RJ-45 8-wire, 25. 4-pin mini DIN
4. DB37 shielded 26. 5-pin DIN
5. DB50 16. M/50 27. 6-pin mini DIN
6. 15-pin high-density 17. Fiber ST 28. 8-pin mini DIN
7. 36-pin Centronics 18. Fiber SC 29. Spade lugs,
8. 50-pin telco 19. Fiber LC length:
9. RJ-11 4-wire 20. Fiber MT-RJ 30. Other:
10. RJ-12 6-wire 21. Fiber MU
11. RJ-22 4-wire 22. Fiber FDDI
12. RJ-45 8-wire 23. M/34 (V.35)

Special Instructions: (Circle options)

- 1. One end cut
2. Pins only
3. Hood type (Plastic if not specified):
Metal hood 45° hood Removable hood
Plastic hood Molded hood
4. Thumbscrews
5. Screw locks: M or F (Male if not specified) metric/English
6. 90° hood—specify cable exit, Pin #
NOTE: Default is Male=Pin 1, Female=Opposite
7. Pairing
8. Flying leads, length:
9. Label:
10. 50-pin telco: ears or bail latches
11. 36-pin Centronics: ears or bail latches
12. Packaging—please attach specs
13. Other—please attach specs

Drain Wire: (Circle one)

(Applies only to foil-shielded cables)

- 1. Cut drain wire
2. Pin drain by itself Pin #
3. Wrap drain with conductor Pin #
If 1-3 are not chosen,
4. Attach drain to shell

COPY AND FAX OR EMAIL THIS FORM

